

OS

SALT WATER CHLORINATOR

PRODUCT DESCRIPTION

- Suitable for pools ranging from 25 m³ to 75 m³
- Intuitive LCD screen displaying real-time water temperature and salinity
- Safe operation with built-in flow switch and alert alarms
- Compact in-line design with control box integrated directly on top of the cell for easy installation
- Flexible pool compatibility with included union tails for both 50 mm rigid PVC pipes and 32/38 mm flexible hoses
- Automatic polarity reversal minimizes scaling and reduces maintenance
- Efficient performance with low salt concentration requirement of just 3 g/L



AQUA
SPHERE

2 YEAR

MANUFACTURER
ORIGINAL
WARRANTY



CHEMICAL
REDUCTION



TECHNICAL DATA


Description	Aquasphere OS 25	Aquasphere OS 50	Aquasphere OS 75
Reference	AQSA25	AQSA50	AQSA75
Production	4 g/h	9 g/h	15 g/h
Pool Volume*	Up to 20 / 25m ³	Up to 40 / 50m ³	Up to 60 / 75m ³
Power supply & consumption	220-240 VAC 34,2W	220-240 VAC 59,4W	220-240 VAC 91,4W
Production	4 g/h	9 g/h	15 g/h
Default pool size setting (can be adjusted)	10m ³	20 m ³	35m ³
Salinity	3 g/L (min / max = 2,5 - 5,5 g/L)		
Water temperature	10 - 60°C max		
Polarity reversal	Yes (8h)		
Production control	Adjustable from 1h to 12h by 1h increments		
Boost mode	Yes (24h)		
Gas sensor	No		
Mechanical flow-switch	Yes		
Pool cover mode	No		
Alarms	Alarms displayed with LED indicator and on-screen indication Low Salt, high Salt, no flow, temperature by LED indicator and on-screen indication		
Cell body	Translucent, inlet/outlet union tailpieces for 38/32mm (above ground pools) & 50mm pipes		
Electrode	Titanium Plates - 7 000h grade		

* Treated water volume based on a 8h/day of use along with filtration with a water temperature at 28°C/25°C

INCLUDED IN THE PACK



Wall fixing



Charger



Unions tail pieces &
collars x2




50mm Unions fittings x2




Water sealing cap

INTERFACE DESCRIPTION

- 1 4 digits LCD screen
- 2 Information Led indicators (Pool size, Flow, Salinity, Auto mode, Boost mode)
- 3 "+" button (value change inside a setting menu)
- 4 Menu button to switch the parameter displayed on the LCD screen, or to press to save a setting
- 5 Switch mode button. Long press to enter or quit boost mode
- 6 Information Led indicators (Error message, low or high salt, chlorine generation status, add salt, on/off status)
- 7 "-" button (value change inside a setting menu)
- 8 Power button to turn device ON & OFF

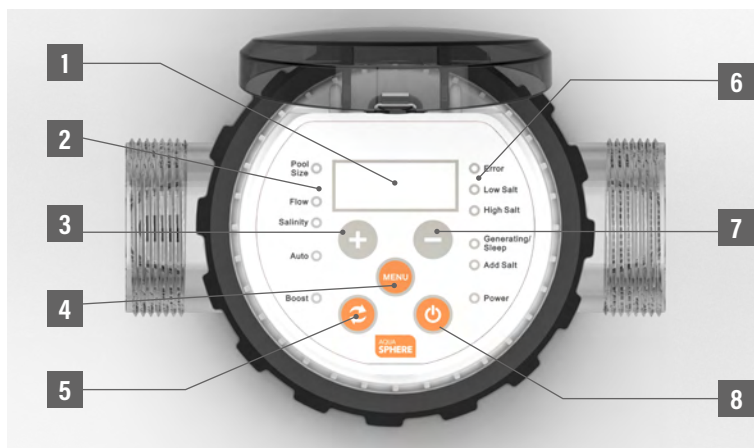

DIMENSIONS

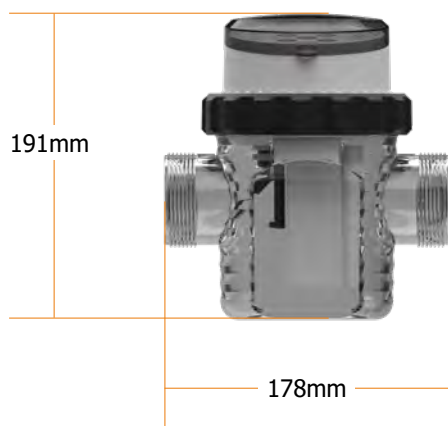

INSTALLATION

